ANGLO BELGIAN CORPORATION n.v.

Wiedauwkaai, 43
9000 GENT - BELGIUM
Tel: ++ 32-(0)9-267.00.00
Fax: ++ 32-(0)9-267.00.67
Telex: 11298 ABC B

Datasheet for ABC Diesel Engine type DZC

Operational circumstances based on ISO-conditions (ISO 3046/I).
ABC reserves the right to alter the technical data without prior notice.

DEFINITION

DZC: Medium speed engine, turbocharged & intercooled, available in Anti-clock and Clock rotation.

BASIC DATA

Cycle: 4 stroke, single acting.
Cylinders: 6-8 in line.
Bore: 256 mm.
Stroke: 310 mm.
Swept volume: 6 cylinders: 95.7 liters. 8 cylinders: 127.6 liters.
Compression ratio: 12.1 / 1.
Injection: Direct, mechanical. One pump per cylinder.

PRESSURES

Brake mean effective pressure (bar)

rpm	720	750	800	900	1000
DZC	18.1	17.9	17.3	16.6	16.6

Maximum combustion pressure (bar)

rpm	720	750	800	900	1000
DZC	114	111	109	109	114

Lubricating oil pressure (bar) (SAE 30 - 75 °C)

rpm	idle speed		720	900
	300	330	750	1000
6DZC	2 - 2.5	2.5 - 3	4.85	5
8DZC	1.75	2	4.85	5

ROTATION SPEED

Piston speed (m/s)

rpm	720	750	800	900	1000
DZC	7.4	7.7	8.2	9.3	10.3

Fire speed: 120 rpm.

WORKING TEMPERATURES (°C)

	Normal	Alarm	Stop
HT-cooling	80-85	90	95
Luboil (LT)	71-75	80	85
Luboil (HT)	76-81	85	90

MASS MOMENT OF INERTIA

6DZC including flywheel: 145 kgm^2
8DZC including flywheel: 181 kgm^2
Data based on standard version.

FUEL CONSUMPTION

gr/kWh[gr/HPh]

rpm	720	750	800	900	1000
6DZC	189	186	187	189	190
	[139]	[137]	[138]	[139]	[140]
8DZC	188	188	188	191	193
	[139]	[139]	[139]	[141]	[142]

For fuel oil:
- *net heat value of 42700 kJ/kg,*
- *without engine-driven pumps,*
- *tolerance: + 5 %.*

OIL CONSUMPTION

6-8DZC: 0.7 gr/kWh [0.5 gr/HPh]

HEAT REMOVAL

(kW_{th}/kW_{eng})

Jacket cooling water:
6DZC: 0.28 **8DZC:** 0.305

Charge air cooling water:

rpm	cyl	120	135	150	166	179
720	6	---	---	---	0.248	0.253
	8	---	---	---	0.237	0.252
750	6	---	0.234	0.242	0.248	0.253
	8	---	---	0.216	0.237	0.250
900	6	0.158	0.177	0.194	0.213	---
	8	---	0.161	0.176	0.190	---
1000	6	0.189	0.212	0.237	0.262	---
	8	---	0.208	0.232	0.240	---

Lubricating oil:

rpm	cyl	120	135	150	166	179
720	6	---	---	---	0.098	0.092
	8	---	---	---	0.095	0.090
750	6	---	0.115	0.106	0.098	0.092
	8	---	---	0.100	0.095	0.092
900	6	0.129	0.122	0.114	0.106	---
	8	---	0.122	0.114	0.106	---
1000	6	0.121	0.114	0.106	0.099	---
	8	---	0.118	0.110	0.104	---

FLOW OF FLUIDS

High Temperature circuit: (m^3/h)

rpm	720	750	800	900	1000
6DZC	36	39	43	48	54
8DZC	52	54	57	64	72

Low Temperature circuit: (m^3/h)

rpm	720	750	800	900	1000
6-8DZC	43	45	48	54	60

Lubricating oil: (m^3/h) (SAE 30 - 75°C)

rpm	720	750	800	900	1000
Pump capacity	31	32	33.8	38	42
6DZC	19.3	19.5	19.7	19.8	20.2
8DZC	23	23.5	23.6	23.8	24

AIR & EXHAUST GAS

Inlet air flow: (m^3/s)

rpm	cyl	120	135	150	166	179
720	6	---	---	---	1.74	1.83
	8	---	---	---	2.37	2.52
750	6	---	1.61	1.71	1.82	1.90
	8	---	2.10	2.29	2.48	2.62
900	6	1.64	1.79	1.95	2.12	---
	8	2.20	2.44	2.66	2.91	---
1000	6	1.97	2.13	2.29	2.47	---
	8	2.62	2.87	3.14	3.42	---

Exhaust gas flow: (m^3/s)

rpm	cyl	120	135	150	166	179
720	6	---	---	---	3.82	4.08
	8	---	---	---	4.51	4.76
750	6	---	3.40	3.69	4.00	4.26
	8	---	3.95	4.34	4.73	4.98
900	6	3.47	3.83	4.21	4.61	---
	8	4.72	5.20	5.68	6.22	---
1000	6	4.11	4.52	4.94	5.38	---
	8	5.22	5.72	6.20	6.72	---

Exhaust gas temperatures: (°C)
a = Temperature at cylinder
b = Temperature before turbine
c = Temperature after turbine

6DZC:

rpm		120	135	150	166	179
720	a	---	---	---	390	405
	b	---	---	---	500	520
	c	---	---	---	375	385
750	a	---	365	380	395	405
	b	---	460	485	505	525
	c	---	345	365	380	385
900	a	375	390	400	410	---
	b	475	495	515	530	---
	c	345	360	375	395	---
1000	a	385	400	410	420	---
	b	485	505	525	540	---
	c	355	370	390	410	---

8DZC:

rpm		120	135	150	166	179
720	a	---	---	---	400	410
	b	---	---	---	465	480
	c	---	---	---	345	350
750	a	---	375	385	400	410
	b	---	430	450	465	480
	c	---	325	335	345	350
900	a	375	390	400	410	---
	b	470	490	510	520	---
	c	340	360	380	390	---
1000	a	385	395	410	430	---
	b	470	490	510	525	---
	c	360	375	390	405	---

Printed by ABC - January 1996

27 NISAN

Datasheet for ABC Diesel Engine type DZC

Operational circumstances based on ISO-conditions (ISO 3046/I)
ABC reserves the right to alter the technical data without prior notice.

TYPE OF ENGINE	rpm	POWER OF THE ENGINE (ISO 3046/I)		NOMINAL POWER OF GENSETS DZC			
				50 Hz electric - 3 phase		60 Hz electric - 3 phase	
		kW	HP	P_W (kW)	P_n (kVA)	P_W (kW)	P_n (kVA)
6DZC-720-166	720	954	1297	---	---	888	1110
6DZC-720-181	720	1032	1403	---	---	955	1193
6DZC-750-135	750	810	1101	754	942	---	---
6DZC-750-150	750	900	1224	837	1047	---	---
6DZC-750-166	750	995	1353	926	1157	---	---
6DZC-750-179	750	1065	1448	991	1239	---	---
6DZC-800-173	800	1104	1500	---	---	---	---
6DZC-900-120	900	864	1175	---	---	804	1005
6DZC-900-135	900	972	1322	---	---	904	1130
6DZC-900-150	900	1080	1468	---	---	1005	1256
6DZC-900-166	900	1194	1623	---	---	1111	1389
6DZC-1000-120	1000	960	1305	893	1116	---	---
6DZC-1000-135	1000	1080	1468	1005	1256	---	---
6DZC-1000-150	1000	1200	1632	1116	1396	---	---
6DZC-1000-166	1000	1326	1803	1234	1542	---	---
8DZC-720-166	720	1272	1729	---	---	1184	1480
8DZC-720-181	720	1376	1870	---	---	1273	1590
8DZC-750-150	750	1200	1632	1116	1396	---	---
8DZC-750-166	750	1326	1803	1234	1542	---	---
8DZC-750-179	750	1420	1931	1321	1651	---	---
8DZC-800-173	800	1472	2000	---	---	---	---
8DZC-900-135	900	1296	1762	---	---	1206	1507
8DZC-900-150	900	1440	1958	---	---	1340	1675
8DZC-900-166	900	1592	2165	---	---	1481	1851
8DZC-1000-135	1000	1440	1958	1340	1675	---	---
8DZC-1000-150	1000	1600	2176	1489	1861	---	---
8DZC-1000-166	1000	1768	2404	1645	2056	---	---

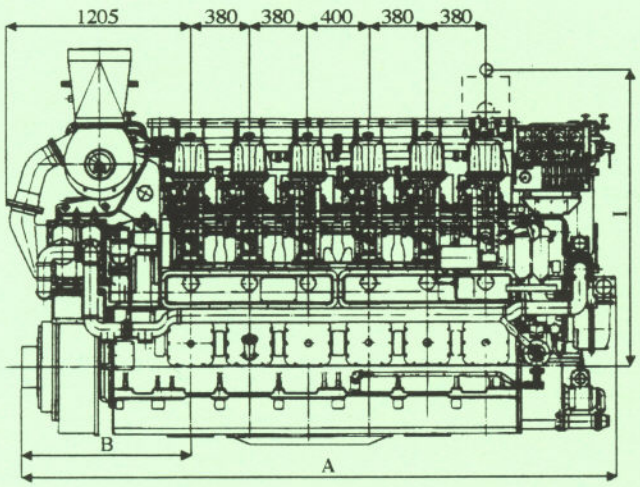

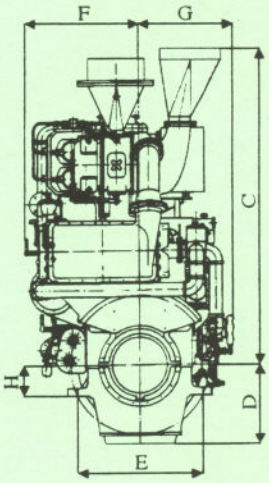

TYPE	Mass (kg)*	A (mm)	B (mm)	C (mm)	D (mm)		E (mm)	F (mm)	G (mm)	H (mm)	I (mm)
					Shallow	Deep					
6DZC	10620	3908	1112	2087	508	650	870	825	622	200	1950
8DZC	13905	4703	1112	2190	508	650	870	825	622	200	1950

* Flywheel, vibration damper and coolers are included.
Conversion factors used: 1 metric HP = 0.736 kW; Generator efficiency: $\eta G = 0.93$; Power factor: $\cos \varphi = 0.8$

Printed by ABC - January 1996